



File No: AP INFRA2 EC VSP 05 2026 2576

## State Environment Impact Assessment Authority (SEIAA), Andhra Pradesh

(Constituted as per the provision of EIA Notification, 2006, as amended by the Ministry of Environment, Forest and Climate Change, Government of India)



Dated: 10/06/2026

To,

Mr Karthik Kumar  
VIZAG HYPERSCALE DATA CENTER PARK LIMITED  
Sy No. 275, Adavivaram (V) and Sy No. 26, Mudarsarlova (V), Visakhapatnam Rural Mandal,  
Visakhapatnam District, Andhra Pradesh., VISAKHAPATANAM, ANDHRA PRADESH, 530028  
psbraju11@gmail.com

**Subject:** Grant of EC under the provision of the EIA Notification 2006-regarding.


**Sir/Madam,**

This is in reference to your application for Grant of EC under the provision of the EIA Notification 2006-regarding in respect of project M/s. Vizag Hyperscale Data Center Park Limited submitted to Ministry vide proposal number SIA/AP/INFRA2/576702/2026 dated 11/05/2026.

2. The particulars of the proposal are as below:

|                                              |                                                |
|----------------------------------------------|------------------------------------------------|
| (i) EC Identification No.                    | EC26C3803AP5471566N                            |
| (ii) File No.                                | AP INFRA2 EC VSP 05 2026 2576                  |
| (iii) Clearance Type                         | EC                                             |
| (iv) Category                                | B2                                             |
| (v) Project/Activity Included Schedule No.   | 8(a) Building / Construction                   |
| (vi) Name of Project                         | M/s. Vizag Hyperscale Data Center Park Limited |
| (vii) Name of Company/Organization           | VIZAG HYPERSCALE DATA CENTER PARK LIMITED      |
| (viii) Location of Project (District, State) | VISAKHAPATANAM, ANDHRA PRADESH                 |
| (ix) Issuing Authority                       | SEIAA                                          |
| (x) Applicability of General Conditions      | no                                             |
| (xi) Applicability of Specific Conditions    | no                                             |

**Copy To**

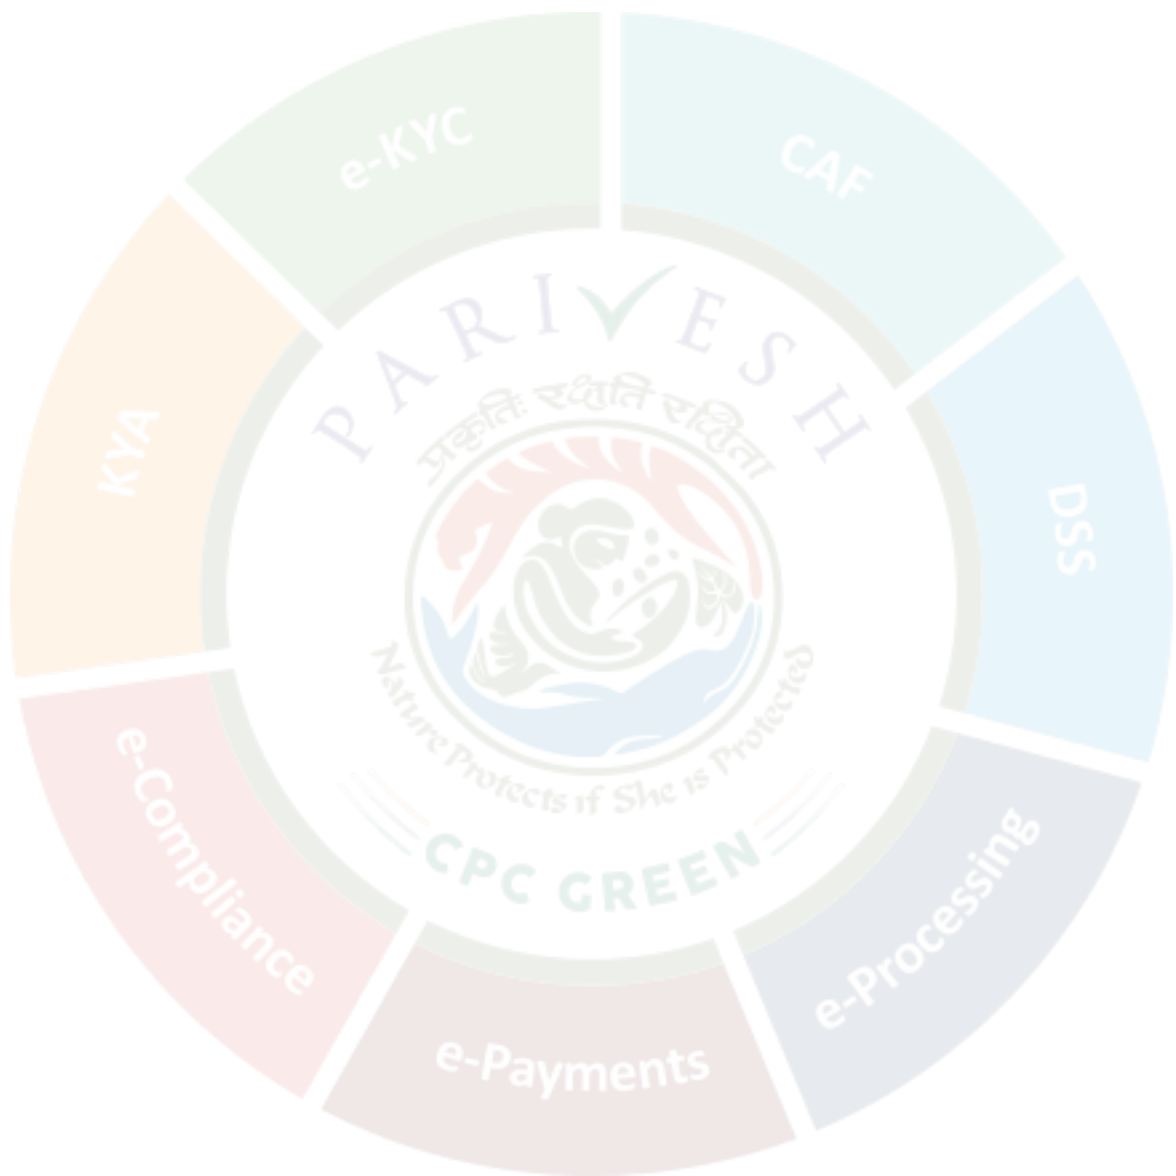

|                                                                                   |                                                                                                  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|  | <b><u>State Level Environment Impact Assessment Authority (SEIAA)</u></b>                        |
|                                                                                   | <b><u>Andhra Pradesh</u></b>                                                                     |
|                                                                                   | <b><u>Ministry of Environment, Forests &amp; Climate Change</u></b>                              |
|                                                                                   | <b><u>Government of India</u></b>                                                                |
|                                                                                   | 3 <sup>rd</sup> floor, AP MARKFED Building,<br>APIIC Colony Road, Auto Nagar, Vijayawada-520007. |

**Order No. SEIAA/AP/INFRA2/EC/VSP/05/2026/2576/290.26&289.19**

**Sub: SEIAA, A.P.– M/s. Vizag Hyperscale Data Center Park Limited, Sy.No.275 of Adavivaram Village & Sy.No.26 of Mudasarlova Village, Visakhapatnam Rural Mandal, Visakhapatnam District, Andhra Pradesh – Environmental Clearance – Issued – Reg.**

- I. This has reference to the application submitted by the proponent through online on 11.05.2026 (SIA/AP/INFRA2/576702/2026), seeking Environmental Clearance for the proposed construction of Mega Data Center Park at Sy.No. 275 of Adavivaram Village and Sy. No 275 of Mudasarlova Village, Visakhapatnam Rural Mandal, Visakhapatnam District, Andhra Pradesh, in favour of M/s. Vizag Hyperscale Data Center Park Limited. The capital investment of the project is Rs. 17,700 Crore.
- II. As seen from the application and EMP submitted by the proponent the following aspects are noted:
  - i. The project proponent proposes to develop a Data Center park with a capacity of 512 MW in the site area of 119.43 Acres i.e., 4,83,343.52 Sq mts (Plinth area for Building 101538.3 Sq.m, Greenbelt 97124.94 Sq.m, Roads 55414.48 Sq.m, Parking area 14520.44 Sq.m & Open Area 214745.36 Sq.m). Total built up area of the project is 1,22,858.74 Sqm., The details of the Built-up area of the project are as follows:

| S. No | Description                    | No. of Floors | Built-Up Area (Sqm) |
|-------|--------------------------------|---------------|---------------------|
| 1     | 1gPOR                          | GF            | 34,327.65           |
| 2     | 2gPOR                          | GF            | 34,327.65           |
| 3     | HUB                            | GF            | 4,000.00            |
| 4     | EYD (Gcub)                     | GF            | 480.00              |
| 5     | EYD (Gcub)                     | GF            | 480.00              |
| 6     | MYD (Gcub)                     | GF            | 10,700.00           |
| 7     | MYD (Gcub)                     | GF            | 10,700.00           |
| 8     | GIS Substation 220 KV          | G+2           | 3,000.00            |
| 9     | GIS Substation 400 KV          | G+2           | 5,400.00            |
| 10    | CRP Room (control relay panel) | G+2           | 1,800.00            |

|              |                                                 |    |                    |
|--------------|-------------------------------------------------|----|--------------------|
| 11           | Fire pump & water tank X 2 No's                 | GF | 480.00             |
| 12           | Pump Room/UG pump X 2 No's                      | GF | 480.00             |
| 13           | Domestic water tank & WTP X 2 No's              | GF | 858.00             |
| 14           | Guard Room X 3 No's                             | GF | 180.00             |
| 15           | HSD Electrical Room X 2 No's                    | GF | 135.00             |
| 16           | STP X 2 No's                                    | GF | 390.00             |
| 17           | Waste management Room (CS+HWR+SWR+BWR) X 2 No's | GF | 600.00             |
| 18           | Parking Area                                    | -  | 14520.44           |
| <b>Total</b> |                                                 |    | <b>1,22,858.74</b> |

- ii. The source of water requirement is Rural Water Supply & Sanitation. The total water requirement is 307 KLD (Fresh water 246 KLD & Recycled water 61 KLD). The domestic wastewater generation from the project is 22 KLD which is proposed to be treated in STPs of capacities 2 x 15 KLD. About 39.0 KLD of wastewater will be generated from equipment cleaning which is proposed to be reused for greenbelt after treatment. The treated domestic wastewater is 22 KLD, which is reused for Flushing 12 KLD & Greenbelt 10 KLD.
- iii. The solid waste generation from the project is approximately 119.0 Kg/day (Non-biodegradable 71.4 Kg/day & Biodegradable 47.6 Kg/day) and the other wastes are E-Waste 6 TPA, Battery waste 200 TPA, Used oil or waste oil 8000 LPA, Horticulture waste 359.36 Kg/day & STP sludge 10 Kgs/day. It is proposed to segregate the wastes at source and disposed as per the applicable Waste Management Rules issued under the Environment (Protection) Act, 1986. D.G sets of capacities 100 X 2.75 MW & 4X 1 MW are proposed to be used during the power failure.

The proposal has been examined and processed in accordance with the EIA Notification, 2006 & its amendments thereof. The State Level Expert Appraisal Committee (SEAC) examined the proposal in its meeting held on **12.05.2026**.

#### Minutes of the SEAC Meeting:-

The proposal submitted by M/s. Vizag Hyperscale Data Center Park Limited is for the construction of a Mega Data Center Park with a built-up area of 122858.74 sq.m, at Sy.No.275 of Adavivaram Village & Sy.No 26 of Mudasarlova Village, Visakhapatnam Rural Mandal, Visakhapatnam District.

The project falls under Item No. 8(a) of the schedule of the EIA Notification 2006 and its amendments thereof - Building and Construction Projects ( $\geq 20,000$  Sq.mtrs and  $\leq 1,50,000$  sq. m. of built up area).

The authorized person, along with their consultant, M/s Pridhvi Envirotech (P) Ltd., have attended the meeting and presented the proposal. The SEAC Committee noted the following:

- a. The APIIC has allocated land about Ac 160, Now M/s Vizag Hyperscale Data Center Park Limited proposed to develop a 512 MW Data Center Park covering an area of 119.4 acres (48.33 Hectares) with a total built-up area is 122858.74 sq.mt. The estimated project cost is Rs. 17,700 Crore.
- b. The Total water requirement of water is 307 KLD (Fresh water 246 KLD + Recycled 61 KLD). Source of water is from Rural Water Supply & Sanitation.
- c. The Source of power requirement is 512 MW and the source is – APTRANSCO standby DG sets of 100 X 2.75 MW & 4X 1 MW.
- d. The domestic wastewater generation from the project is 22 KLD which will be treated in STP of capacities 2 x 15 KLD. No waste water from the process.
- e. The total treated domestic wastewater is 22 KLD. Out of which for Flushing is 10 KLD, Greenbelt-10 KLD.
- f. The PP also proposed to use 39 KLD of water for washing and cleaning of the machinery. The PP proposed to use the washed water for greenbelt development after necessary treatment.
- g. The committee appraised the application from the Environmental point of view only with respect to liquid, solid and air pollution management.
- h. As per the Parivesh Portal, the Kambalakonda Wildlife Sanctuary is located at a distance about 850 Km from the proposed project.
- i. The Divisional Forest Officer (DFO), Visakhapatnam, vide letter dt.08.05.2026 issued Forest NoC stating that the proposed area is falling outside the forest area with a distance of 750 metres away from Kambalakonda Wildlife Sanctuary, 470 metres from Eco-Sensitive Zone of Kambalakonda Wildlife Sanctuary and 3.90 Kms from Seethakonda Reserve Forest for Acres Sy No. 275 (extent of Acres 153.00 cents) of Adavivaram Village & Sy.no.26 (extent of Acres 7.00 Cents) of Mudasarlova Village, Visakhapatnam Rural Mandal, Visakhapatnam District.
- j. The unit proposes to install air-cooled chillers in the data center parks to efficiently dissipate the heat generated by IT equipment and maintain the required temperature conditions for reliable operations.

- k. The unit proposes to group the emissions from the DG sets and connect them to a common stack, which will be installed above the building of 13m height.
- l. The project proponent allocated Rs. 900 Lakhs as capital cost and Rs. 155.0 Lakhs/ annum as a recurring cost budget for the EMP. The proponent volunteered to develop avenue plantation in Visakhapatnam city by indicating their company sign Boards as a part of Corporate Social Responsibility (CSR) activity and shall maintain till it grows.

The Committee, after examining the project proposals, presentations, MoEF&CC' Notifications & OMs, detailed deliberations, recommended to issue Environmental Clearance with the following additional conditions:

1. The proponent shall comply with the proposals furnished in the Environmental management plan.
2. The unit shall implement a Zero Liquid Discharge (ZLD) system, and no discharge shall be permitted outside the premises.
3. The construction debris shall be used for back filling of the project site to the maximum extent possible and the remaining shall be disposed duly complying with the construction and demolition waste management rules 2016.
4. The project proponent shall implement solid waste management as per the Solid Waste Management Rules, 2016 applicable for constructions projects.
5. The proponent shall construct and commission STP- 2 x 15 KLD along with commissioning of project to treat the domestic waste water to meet irrigation standards at any point of time before using for gardening purpose. The treated waste water proposed for recycle, suitable disinfection system shall be provided in addition to the STP.
6. The waste water generated from washing of machinery shall be used for greenbelt development after necessary treatment.
7. As proposed by the PP, the PP shall provide air cooled chillers in the data centre parks to efficiently dissipate the heat generated by IT equipment and maintain the required temperature conditions for reliable operations.
8. The project proponent shall implement the E-Waste (Management) Rules, 2016.
9. The parking area shall be in compliance with NBC/MoEF&CC, GoI / Local Govt regulations as applicable whichever, is higher.
10. The project proponent shall develop the avenue plantation along the approach roads leading to the proposed project site.

11. The project proponent shall treat the effluents to meet the standards stipulated by MoEF&CC GoI vide notification G.S.R 1265 (E) 13.07.2017 for discharge into water bodies as well as for land disposal/applications.
12. Dual plumbing system to be provided for reuse of the treated effluent for flushing and other purposes.
13. The project proponent shall install organic waste converter for the treatment and disposal of wet garbage in a scientific manner.
14. Solar Energy Systems shall be installed to utilize at least one third of the roof area.
15. The project proponent shall use only LED lights in the common areas and internal roads and shall provide timer-based lighting management in common area, Light levels shall be selected to suit the functional requirements, shall use high efficiency low-e glass type for windows, automatic timer controls for external lighting, ETC for energy conservation.
16. The building shall be designed for compliance with earth quake resistance and resisting other natural hazards.
17. The proponent shall construct rainwater harvesting pit and storm water drains for collection, usage and also for groundwater table maintenance within the premises.
18. The project proponent shall create a corpus fund to ensure continuous operation of STP and shall comply with the proposals furnished in the Environmental management plan.
19. The project proponent shall obtain all statutory permissions if any from all the regulatory departments including Fire Department before starting the construction.
20. The project proponent shall provide GI sheets around the compound wall during the construction stage to avoid dust particles arises.
21. The PP shall provide the DG sets stack above the top floor of the building of 13m height.

**The State Level Environment Impact Assessment Authority (SEIAA),** in its meeting held on 05.06.2026, examined the proposal along with the recommendations of the SEAC, and **decided to accept the aforesaid recommendations of the SEAC for strict compliance by the proponent and to issue the Environmental Clearance.**

**The SEIAA, A.P., hereby accords the Environmental Clearance to the project as mentioned at Para No. I & II,** under the provisions of the EIA Notification, 2006, and its subsequent amendments issued under Environment (Protection) Act, 1986 subject to compliance of the following conditions.

**PART-A: SPECIAL CONDITIONS:**

1. The proponent shall not violate the provisions of the following Acts & Rules and subsequent amendments:
  - a. Forest Conservation Act, 1980;
  - b. Wild Life (Protection) Act, 1972;
  - c. CRZ Notification, 2011;
  - d. The Eco sensitive areas as notified under Environment (Protection) Act, 1986;
  - e. Critically polluted areas as notified by CPCB and also shall not harm livestock and human beings and disturb their activities.
2. The proponent shall comply with the proposals furnished in Environmental management plan.
3. The project proponent shall allocate Rs. 900 Lakhs as capital cost and Rs. 155.0 Lakhs/ Annum as recurring cost budget for the EMP. The proponent volunteered to develop avenue plantation in Visakhapatnam city by indicating their company sign Boards as a part of Corporate Social Responsibility (CSR) activity and the same shall be fulfilled.
4. The unit shall implement a Zero Liquid Discharge (ZLD) system, and no discharge shall be permitted outside the premises.
5. The construction debris shall be used for back filling of the project site to the maximum extent possible and the remaining shall be disposed duly complying with the Construction and Demolition Waste Management Rules 2016.
6. The project proponent shall implement solid waste management as per the Solid Waste Management Rules, 2016 applicable for constructions projects.
7. The proponent shall construct and commission STPs 2 x 15 KLD along with commissioning of project, treat the effluents to meet irrigation standards at any point of time before using for gardening purpose or disposal into municipal drain, the treated effluents is proposed for recycle, the suitable disinfection system shall be provided in addition to the STPs.
8. The waste water generated from washing of machinery shall be used for greenbelt development after necessary treatment.
9. As proposed by the PP, the PP shall provide air cooled chillers in the data centre parks to efficiently dissipate the heat generated by IT equipment and maintain the required temperature conditions for reliable operations.

10. The project proponent shall implement the E-Waste (Management) Rules, 2016.
11. The parking area shall be in compliance with NBC/MoEF&CC, GoI / Local Govt regulations as applicable whichever, is higher.
12. The project proponent shall develop the avenue plantation along the approach roads leading to the proposed project site.
13. The project proponent shall treat the effluents to meet the standards stipulated by the MoEF&CC, GoI vide notification G.S.R 1265 (E) 13.07.2017.
14. Dual plumbing system to be provided for reuse of the treated effluent for flushing and other purposes.
15. The project proponent shall install organic waste converter for the treatment and disposal of wet garbage in a scientific manner.
16. Solar Energy Systems shall be installed to utilize at least one third of the roof area.
17. The project proponent shall use only LED lights in the common areas and internal roads and shall provide timer-based lighting management in common area, Light levels shall be selected to suit the functional requirements, shall use high efficiency low-e glass type for windows, automatic timer controls for external lighting, ETC for energy conservation.
18. The building shall be designed for compliance with earth quake resistance and resisting other natural hazards.
19. The proponent shall use ash-based bricks, tiles, sintered ash aggregate or other ash-based products in the Construction activity, duly complying with the MoEF&CC, GoI, Notification S.O. 5481(E) dated 31.12.2021 & its amendments thereof.
20. The proponent shall construct rainwater harvesting pit and storm water drains for collection, usage and also for groundwater table maintenance within the premises.
21. The proponent shall construct rainwater harvesting pit and storm water drains for collection, usage and also for groundwater table maintenance within the premises.
22. The project proponent shall create a corpus fund to ensure continuous operation of STP and shall comply with the proposals furnished in the Environmental management plan.
23. The project proponent shall obtain all statutory permissions if any from all the regulatory departments including Fire Department before starting the construction.
24. The project proponent shall provide GI sheets around the compound wall

- during the construction stage to avoid dust particles arises.
25. The project proponent shall provide the DG sets stack above the top floor of the building of 13m height.
  26. Solar Energy systems to be planned in appropriate space as stipulated by the concerned regulatory authority.
  27. The building shall be designed for compliance with earth quake resistance and resisting other natural hazards. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
  28. Provision for Rain Water Harvesting (RWH) is to be made for collection, usage and also for ground water table maintenance.
  29. The proponent shall obtain required clearances if any from all regulatory Departments including Fire Department, before starting the construction.
  30. The proponent shall develop green belt in an area not less than 10% of plot area in addition to green belt in set-back areas.
  31. The proponent will be squarely responsible for proper implementation of solid waste management plan, prevention of air pollution, water pollution, and any other kind of pollution/health hazard.
  32. The proponent shall comply with Conceptual Plan, Form 1A and EMP.
  33. The proponent is advised to ensure safety to animal and public life.
  34. The project proponent shall prepare a tree enumeration plan and develop compensatory greenbelt in 1:2 ratio. The project proponent shall develop thick greenbelt with indigenous plants all around the project area, open spaces and along the approach road, to achieve the stipulated 1:2 ratio. The proponent shall plant minimum 2 mts height saplings and shall be responsible for their survival. The proponent shall furnish the geo-tagged coordinates of the plantation and ensure continuous monitoring.
  35. The proponent shall ensure that the activities of the proposed project should not adversely impact the Mudasarlova Reservoir and Kambalakonda Wild Life Sanctuary.
  36. The proponent shall ensure that emissions from diesel generator sets to be within the CPCB / MoEF&CC stipulated standards.

## **PART-B SPECIFIC CONDITIONS:**

### **I. CONSTRUCTION PHASE:**

1. Provision shall be made for the housing of the construction labour within the site with all necessary infrastructure and facilities such as safe drinking water, fuel for cooking, mobile toilets, mobile STP,

medical health care, crèche etc., The housing may be in the form of temporary structures to be removed after the completion of the project. The safe disposal of wastewater and solid wastes generated during the construction phase should be ensured. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.

2. A First Aid Room shall be provided in the project both during construction and operation of the project.
3. All the topsoil excavated during construction activities should be stored for use in horticulture/landscape development within the project site.
4. Disposal of muck during construction phase should not create any adverse effect on the neighbouring communities and be disposed taking the necessary precautions for general safety and health aspects of people, only in approved sites with the approval of competent authority.
5. Soil and ground water samples will be tested at regular interval to ascertain that there is no threat to ground water quality by leaching of heavy metals and other toxic contaminants. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
6. Construction spoils, including bituminous material and other hazardous materials, must not be allowed to contaminate watercourses and the dump sites for such material must be secured so that they should not leach into the ground water. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
7. Any hazardous waste including biomedical waste, if any, should be disposed of as per applicable Rules & norms with necessary approvals of the Andhra Pradesh Pollution Control Board.
8. The diesel generator sets to be used during construction phase should conform to E (P) Rules prescribed for air and noise emission standards.
9. Vehicles hired for bringing construction material to the site should be in good condition and should conform to applicable air and noise emission standards and should be operated only during non-peak hours.
10. Ambient noise levels should conform to the residential standards both during day and night as notified by the MoEF&CC, GOI from time to

time. Incremental pollution loads on the ambient air and noise quality should be closely monitored during construction phase. Adequate measures should be made to reduce ambient air and noise level during construction phase, so as to conform to the stipulated standards by the CPCB.

11. Ready mixed concrete must be used in building construction in consultation with concerned regulatory authority.
12. Storm water control and its re-use shall be as per CGWB and BIS standards for various applications.
13. Permission to draw ground water shall be obtained from the competent Authority prior to construction/operation of the project.
14. Water demand during construction should be reduced by use of pre-mixed concrete, curing agents and other best practices in consultation with concerned regulatory authority.
15. Fixtures for showers, toilet flushing and drinking should be of low flow either by use of aerators or pressure reducing devices of sensor-based control. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
16. Use of glass may be reduced by up to 40% to reduce the electricity consumption and load on air-conditioning. If necessary, high quality double glass with special reflective coating in window is to be used. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
17. Roof should meet prescriptive requirement as per Energy Conservation Building Code by using appropriate thermal insulation material to fulfill requirement. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
18. Adequate measures to reduce air and noise pollution during construction keeping in mind CPCB norms on noise limits.
19. Opaque wall should meet prescriptive requirement as per Energy Conservation Building Code which is proposed to be mandatory for all air-conditioned spaces while it is aspirational for non-airconditioned spaces by use of appropriate thermal insulation material to fulfil requirement in consultation with concerned regulatory authority.
20. The approval of the competent authority shall be obtained for structural safety of the buildings due to earthquake, adequacy of fire-fighting equipment's, etc. as per National Building Code including protection

measures from lightening etc. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.

21. No tree can be felled/transplant unless exigencies demand. Where absolutely necessary, tree felling shall be with prior permission from the concerned regulatory authority. Old trees should be retained based on girth and age regulations as may be prescribed by the Forest Department. Plantations to be ensured species (cut) to species (planted).
22. A minimum of 1 tree for every 80 sqm of land should be planted and maintained. The existing trees will be counted for this purpose. The landscape planning should include plantation of native species. The species with heavy foliage, broad leaves and wide canopy cover are desirable. Water intensive and/or invasive species should not be used for landscaping.
23. Regular supervision of the above and other measures for monitoring should be in place all through the construction phase, so as to avoid disturbance to the surroundings.

## **II. Occupational Phase:**

24. The installation of the Sewage Treatment Plant (STP) should be certified by an independent expert and a report in this regard should be submitted to the SEIAA before the project is commissioned for operation. Discharge of treated sewage shall conform to the norms & standards of the Andhra Pradesh Pollution Control Board. Sewage Treatment Plant should be monitored on a regular basis. No waste water shall be discharged outside the premises until outlet is connected to public sewer line. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
25. Rain water harvesting for roof run-off and surface run-off, as plan submitted should be implemented. Before recharging the surface run off, pre-treatment must be done to remove suspended matter, oil and grease. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
26. At least 20% of the open spaces as required by the local building bye-laws shall be pervious. Use of Grass pavers, paver blocks with at least 50% opening, landscape etc. would be considered as pervious surface.
27. The solid waste generated should be properly collected & segregated before disposal to the Facility. The organic waste shall be composted. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.

28. The D.G. Sets shall be provided with acoustic enclosures and adequate stack height as per CPCB norms. The fuel used for the diesel generator sets should be low sulphur diesel and should conform to E (P) Rules prescribed for air and noise emission standards.
29. Any hazardous waste should be disposed of as per the Hazardous and other Wastes (Management and Transboundary movement) Rules, 2016 and its amendments thereof & Biomedical waste Management Rules, with necessary approvals of the Andhra Pradesh Pollution Control Board.
30. The green belt design along the periphery of the plot shall achieve attenuation factor conforming to the day and night noise standards prescribed for residential land use by the MoEF&CC, GOI/CPCB. The open spaces inside the plot should be suitably landscaped and covered with vegetation of indigenous variety. During night time the noise levels measured at the boundary of the building shall be restricted to the permissible levels to comply with the prevalent regulations. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
31. Incremental pollution loads on the ambient air quality, noise and water quality should be periodically monitored after commissioning of the project. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
32. Application of solar energy should be incorporated for illumination of common areas, lighting for gardens and street lighting in addition to provision for solar water heating. A hybrid systems or fully solar system for a portion of the apartments should be provided by utilizing appropriate space for solar energy system as stipulated by the concerned regulatory authority.
33. Traffic congestion near the entry and exit points from the roads adjoining the proposed project site must be avoided. Parking should be fully internalized and no public space should be utilized. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
34. Adequate number of parking spaces shall be provided for visitor vehicles. Rest room facilities should be provided for service population. The proponent shall provide public convenience facilities such as toilets, bathrooms, waiting rooms etc. for the drivers, workers etc. so as to maintain cleanness/hygienic conditions in the surroundings of the project. Appropriate necessary action must be taken with prior

concurrence of the concerned Regulatory Authority.

35. The proponent shall comply with Energy Conservation Practices, Energy efficient practices and energy audit practices. Wherever feasible, green building concepts shall be adopted. Use of solar panels may be done to the extent possible. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.
36. Adequate measures should be taken to prevent odour problem from solid waste processing plant and STP. Appropriate necessary action must be taken with prior concurrence of the concerned Regulatory Authority.

#### **PART – C. GENERAL CONDITIONS:**

37. **This Environmental Clearance order is valid for a period of 10 years.**
38. The proponent shall scrupulously follow any conditions stipulated by Revenue department/ Panchayat Raj/ Municipal administration/local self-government bodies (Gram panchayat /Gram secretariat) in ensuring safety to human and animal life. The APPCB to ensure the same while according CTE/CTO.
39. Proponent shall ensure that there is no disturbance to flora and fauna. Serenity of nature must be protected at any cost.
40. "Consent to Establish" shall be obtained from Andhra Pradesh Pollution Control Board under Air and Water Act before the start of any activity /construction work at site.
41. The project proponent shall submit Half-yearly reports on the status of compliance of the stipulated Environmental Clearance Conditions including results of monitored data to the Sub-Office, MoEF&CC, Vijayawada; SEIAA, A.P., and A.P. Pollution Control Board and also shall upload in the Proponent's website.
42. Post Environment Clearance Monitoring: It shall be mandatory for the project manager to upload half yearly compliance reports in respect of the stipulated prior Environment Clearance terms and conditions in PARIVESH portal on 1<sup>st</sup> June and 1<sup>st</sup> December of each calendar year.
43. The APPCB shall monitor the EC conditions stipulated by SEIAA as per GO Ms No 120 dated 01.11.2018 of EFS&T Dept., and ensure the compliance.

44. The proponent shall obtain prior permissions and continued guidance from regulatory authorities for all the above conditions wherever it is required.
45. All safety norms as stipulated in various laws and statutes shall be scrupulously followed by the proponent. PCB shall ensure compliance to the conditions stipulated by SEIAA.
46. Officials from the Sub-Office of MoEF&CC, Vijayawada / The SEIAA, Andhra Pradesh through Andhra Pradesh Pollution Control Board, who would be monitoring the implementation of environmental safeguards should be given full co-operation, facilities and documents/data by the project proponents during their inspection. A complete set of all the documents shall be submitted to the CCF, Sub-Office, MoEF&CC Vijayawada.
47. In the case of any change (s) in the scope of the project, the project would require a fresh appraisal by this SEIAA. No further expansion or modifications in the project shall be carried out without prior approval of the SEIAA, AP.
48. The project proponent shall submit the copies of the environmental clearance to the Heads of local bodies, Panchayats and Municipal Bodies in addition to the relevant offices of the Government who in turn have to display the same for 30 days from the date of receipt.
49. The proponent shall obtain clearance from Fire Department. All other statutory clearances shall be obtained, as applicable by project proponents from the competent authorities.
50. The project proponent should advertise in at least two local Newspapers, widely circulated in the region, one of which shall be in the vernacular language informing that the project has been accorded environmental clearance and copies of clearance letters are available with the Andhra Pradesh Pollution Control Board. The advertisement should be made within 7 days from the day of issue of the clearance letter and a copy of the same should be forwarded to the Sub-Office of this Ministry at Vijayawada.
51. The funds earmarked for environmental protection measures (Capital Cost Rs.900 Lakhs and recurring Cost Rs. 155.0 Lakhs/annum) should be kept in separate account and should not be diverted for other purpose. Year wise expenditure should be reported to the SEIAA and Ministry's Sub-Office located at Vijayawada.

52.

Any appeal against this Environmental Clearance shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

53. The SEIAA may revoke or suspend the order, if implementation of any of the above conditions is not satisfactory. The SEIAA reserves the right to alter/modify the above conditions or stipulate any further condition in the interest of environment protection.
54. This Environmental clearance shall be subject to the Orders of the Hon'ble Supreme Court of India, Hon'ble High Courts, NGT and any other Court of Law, from time to time, and as applicable to the project.
55. SEIAA also reserves the right to cancel the EC issued at anytime, if EC has been obtained by the proponent through suppression of any information or furnishing false information.
56. Concealing the factual data or failure to comply with any of the conditions mentioned above may result in withdrawal of this clearance and attract action under the provisions of Environment (Protection) Act, 1986 without any prior notice.
57. These stipulations would also be enforced among others under the provisions of Water (Prevention and Control of Pollution) Act, 1974, the Air (Prevention and Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986, the Public Liability (Insurance) Act, 1991 and EIA Notification, 2006 and related Acts.

**SPECIAL SECRETARY TO GOVT**

**MEMBER SECRETARY,  
SEIAA, A.P.**

**MEMBER,  
SEIAA, A.P.**

**CHAIRMAN,  
SEIAA, A.P.**

**To**

M/s. Vizag Hyperscale Data Center Park Limited,  
Authorised Signatory: Mr Karthik Kumar,  
Sy.No. 275, Adavivaram (V) and  
Sy No. 26, Mudarsarlova (V),  
Visakhapatnam Rural Mandal,  
Visakhapatnam District, Andhra Pradesh - 530028.

**Copy to:**

1. The Chairman, SEAC, A.P. for kind information.
2. The Member Secretary, APPCB for kind information.

3. The Secretary, MoEF&CC, GoI New Delhi for kind information.
4. The District Collector, Visakhapatnam District, Andhra Pradesh for kind information.
5. The EE, RO: Visakhapatnam, APPCB for information.
6. The MoEF&CC, GoI, Sub-Office, Vijayawada for information.
7. Monitoring cell, MoEF&CC, GoI, New Delhi for information.

